


Building Future with Nature in Mind.

Smart & Green Prefabrik Moduler Yapı San. ve Tic. Ltd. Şti.

SG300 SERIES


3,00 x 7,00m
Life Containers

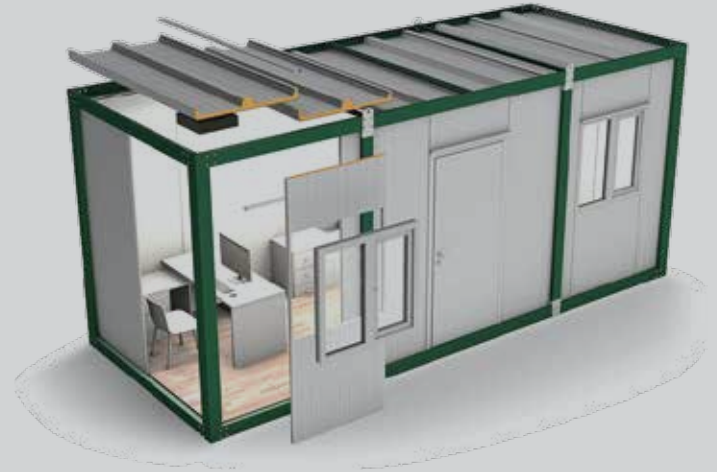

SG 307

Technical Specifications

Length	: 7.00m	Plumbing	: Above the Plaster
Width	: 3.00m	Exterior Door	: Insulated Sheet Door
Height	: 2.60m	Windows	: White Color PVC Window
Total Area	: 21m ²	Electrical Installation	: Above the Plaster
Interior Wall	: 40mm Sandwich Panel	Exterior Door Paint	: Electrostatic Painted Galvanized Sheet
Exterior Wall	: 40mm Sandwich Panel	Equipment	: TSE Certified Kitchen and Bathroom
Interior Door	: American Press Door	Furniture	: Laminated MDF countertop
Load Carrying Capacity : 200 kg/m ²			

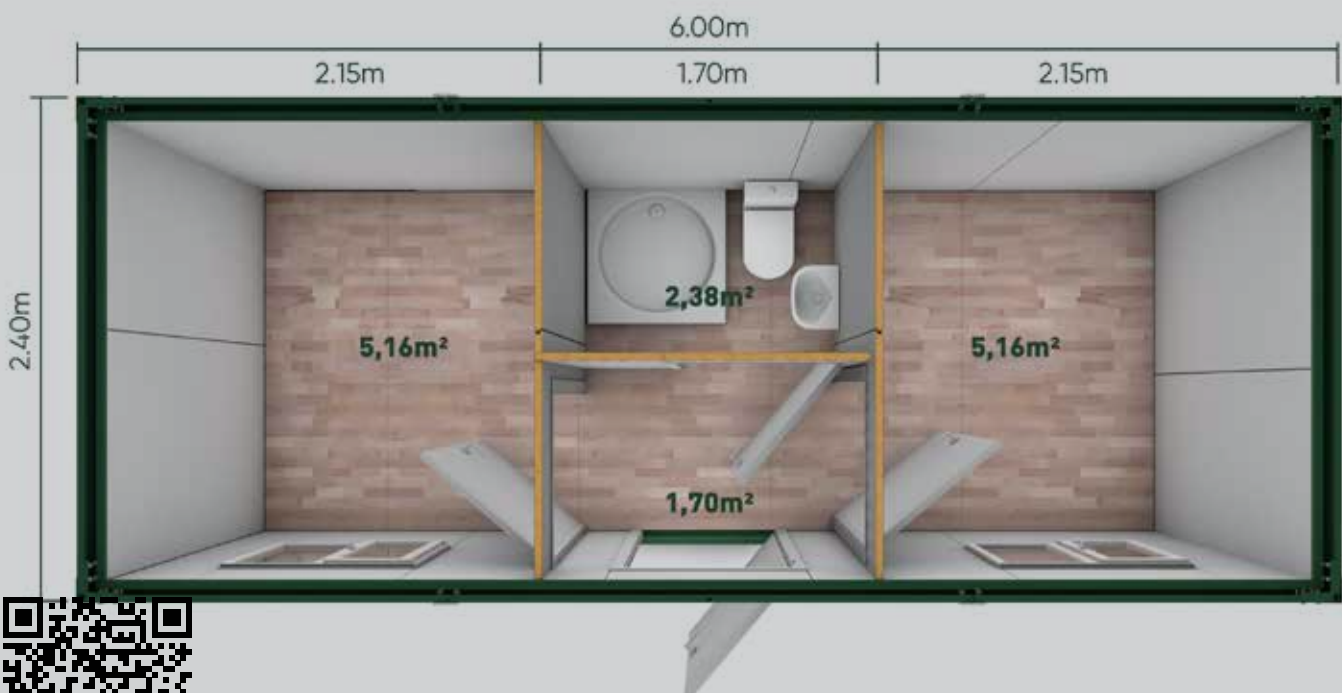

SG 300 SERIES

General Technical Specifications

PRODUCTION METHOD	- Production is being made only by using high quality galvanized steel - The main structure is being formed by the C and U profiles which was produced by rollform and hydraulic press machines. - All products are being delivered to site unassembled and whole construction is being designed to ensure easy and rapid assembly.
PACKING SYSTEM	- Flatpack packing system designed to ship the S&G's container systems. All of the connection details designed using bolts and nuts with special locking mechanism. - All components of the container such as wall panels, doors, windows, and electric & sanitary installations are placed inside each flatpack unit.
LIFTING SYSTEM	- Containers are designed to lift individually. There are 4 eyebolts are placed on the top of each unit for lifting purposes. - Please make sure the eyebolts are assembled correctly and safety ropes are distributed evenly before lifting - Containers must be empty before lifting and all job safety measures must be strictly followed - PPE must be worn at all times and while the container is lifted no one will remain underneath the unit.
TECHNICAL FEATURES	- Chasis Load Capacity : 200 kg/m² - Wind Speed : 80 km/h - Snow Load : 80 kg/m² - Earthquake condition : 1st Degree - Positioning : The container must be placed on a flat surface
FLOOR STRUCTURE	- Method : Specially designed C and U profiles produced using high quality galvanised steel - Covering : 14mm thick cement board covered with 2mm thick patterned high traffic vinyl - Floor Thermal Conductivity Coefficient : K: 2,97 Kcal/m² hC
WALLS	- Total External Height : 2700 mm - Interior Net Height : 2500 mm - Thickness : 40 mm - Insulation : Polyurethane 40m³ - External Surface Covering : Ral 9002 painted 0,30 mm thick corrugated steel sheet - Internal Surface Covering : Ral 9002 painted 0,30 mm thick corrugated steel sheet - Thermal conductivity coefficient: K: 0,58 Kcal/m²hC
ROOF CHASIS	- Roof Thermal conductivity coefficient : K: 0,47 Kcal/m²hC - Roof Construction : Specially designed C and U profiles produced using high quality galvanised steel - Roof Covering : 40 mm thick, 3 ribs Sandwich Panel - Panel Outer Surface : RAL 9002 painted Galvanized steel sheet - Panel Inner Surface : RAL 9002 painted Galvanized steel sheet - Insulation : Polyurethane 40 kg/m³ - Rain waters are evacuated by the holes in the top frame
EXTERNAL DOOR	- Description : RAL9002 painted Galvanized steel sheet industrial door - Insulation : EPS - Dimensions : 880x1960mm Steel Chasis thickness is 1,2 mm - Door lock & Handle : Cylinder type lock, Handle is grey color, TSE certified
WINDOWS	- External Windows : 1000x1000 mm Double glazed PVC - External Windows Handles : PVC
ELECTRIC INSTALLATION	- Method : On the plaster - Plug and Switches : TSE Certified, Located in every room - Lighting : LED lightnings, TSE Certified - Cables : TSE Certified, Located in every room
SANITARY INSTALLATION	- Method : On the plaster - Toilet Bowls : TSE Certified Ceramic toilet bowls with PVC flush tank - Handwashing Basin : TSE Certified Ceramic Handwash basin - Pipes : TSE Certified PVC clear and grey water piping system - Shower Tray : Fiberglass specially designed square shower tray - Fixtures : TSE Certified Fixtures



S&G Prefab keeps the right to change the specs

SG PREFABRİK MODÜLER YAPI SİS. SAN. VE TİC. LTD. ŞTİ

Merkez | Head Office

: Küçükbakkalköy Mh. Derebey Sk.
Dumankaya Flex Residence No:13/50
Ataşehir / İstanbul / Türkiye

Fabrika | Factory

: Çevrik Mh. 162. Sk. Sermed Sit. No:7
Cumayeri / Düzce / Türkiye

sgprefab.com | +90 216 510 23 20 | info@sgprefab.com

